


FTTH XPON ONT 1LAN/POE

ST-XP116

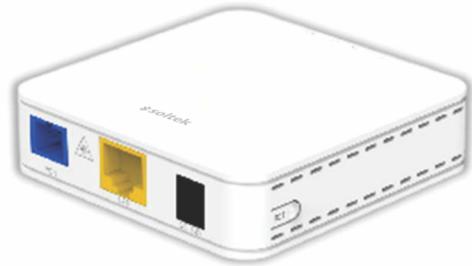

Key Features :

XPON

XPON Dual Mode
Plug&Play



Detecting
Rogue ONU



Wide Working Temp
-30°C ~ +60°C



POE(PD)
Power Supply

Product Overview


ST-XP116 (XPON 1GE POE(PD) ONU) is specially designed to meet the access requirements of telecom operators such as FTTH and SOHO. The ONU is based on high-performance chip technology solutions, and supports Layer 2/Layer 3 functions, providing data services for carrier-grade FTTH applications.

ST-XP116 supports Reverse POE function, which can be deployed in some application scenarios where it is inconvenient to obtain power. We can supply power to the ST-XP116 through the user-end device.

The ONT has high reliability and can be applied to a wide temperature environment; and has a powerful firewall function, which is easy to manage and maintain. It can provide QoS guarantee for different services. The ONT complies with international technical standards such as IEEE802.3ah and ITU-T G.984.

Hardware Parameter	
Dimension	82mmx82mmx25mm(LxWxH)
Net weight	0.085Kg
Operating condition	<ul style="list-style-type: none"> • Operating temp: -30°~+60° • Operating humidity:10~90% (non-condensing)
Storing condition	<ul style="list-style-type: none"> • Storing temp:-30° ~ +70°C • Storing humidity: 10 ~ 90% (non-condensing)
Power adapter	DC 12V/ 0.5A, external AC-DC power adaptor
Power supply	POE(PD) DC +12 ~ +24V
Interfaces	1GE
Indicators	SYS, REG, LINK/CT
Interface Parameter	
PON interface	<ul style="list-style-type: none"> • 1XPON port(EPON PX20+ & GPON Class B+) • SC single mode, SC/UPC connector • TX optical power: 0~+4dBm • RX sensitivity: -27dBm • Overload optical power: -3dBm(EPON) or -8dBm(GPON) • Transmission distance: 20KM • Wavelength: TX 1310nm, RX1490nm
LAN interface	<ul style="list-style-type: none"> • 1*GE,Auto-negotiation, RJ45 connectors • POE 12V~24V DC
Software Key Feature	
PON mode	XPON Dual mode , Can access to mainstream EPON/GPON OLTs.
Uplink Mode	Bridging mode and Routing mode.
Smart O&M	Rogue-ONU detection and Hardware Dying Gasp
Firewall	DDOS, Filtering Based on ACL/MAC/URL

Application Chart:

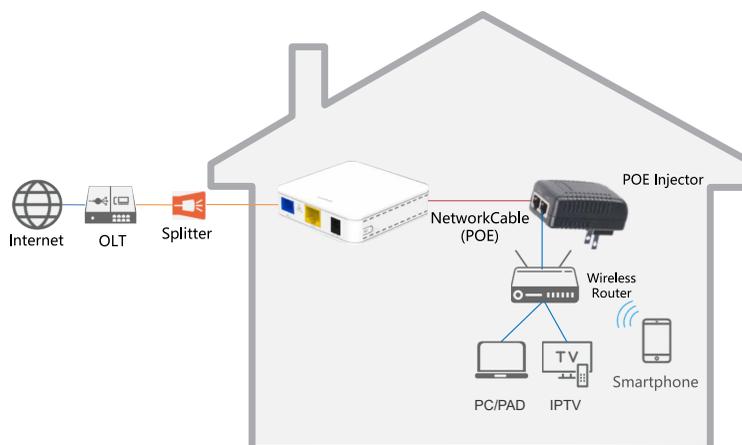

Software Parameter	
Basic	<ul style="list-style-type: none"> • Support MPCP discover&register • Support authentication Mac/Loid/Mac+Loid • Support Triple Churning • Support DBA bandwidth • Support auto-detecting, auto-configuration, and auto firmware upgrade • Support authentication SN/Psw/Loid/Loid+Psw
Alarm	<ul style="list-style-type: none"> • Support Dying Gasp • Support Port Loop Detect • Support Eth Port Los
LAN	<ul style="list-style-type: none"> • Support Port rate limiting • Support Loop detection • Support Flow control • Support Storm control
VLAN	<ul style="list-style-type: none"> • Support VLAN tag mode • Support VLAN transparent mode • Support VLAN trunk mode(max 8 vlans) • Support VLAN 1:1 translation mode(≤8 vlans) • Auto VLAN detection
Multicast	<ul style="list-style-type: none"> • Support IGMPv1/v2 • Support IGMP Snooping • Max Multicast vlan 8 • Max Multicast Group 64
QoS	<ul style="list-style-type: none"> • Support 4 queues • Support SP and WRR • Support 802.1P
L3	<ul style="list-style-type: none"> • Support IPv4 • Support DHCP/PPPOE/Static IP • Support Static route • Support NAT
Q&M	<ul style="list-style-type: none"> • Support CTC OAM 2.0 and 2.1 • Support ITUT984.x OMCI • Support EMS\TR069/WEB/TELNET/CLI



SUMICO

Tarvij Sanat Sumi Parsian Co. LTD
No.1, 4th Narges Alley, Azadi Bolv. Shams-Abad Industry Park,
Tehran-Qom Highway, Hasan Abad Fashafooye, Tehran, Iran
Tel: +98 21 43614000 Fax:+98 21 43614300
E-Mail:info@sumico.ir PC: 1834179535

توجه :

sumico حق تغییر مشخصات را بدون اطلاع قبلی دارد. اگر چه اطلاعات جمع آوری شده در این دیتاشیت با دقت صورت گرفته، ولی نباید تضمینی برای محصول نهایی گردد. sumico فقط در رابطه با مشخصاتی که عیناً در فاکتور فروش و هنگام عقد قرارداد قید میشود، مسئولیت دارد. هرگونه استفاده و کپی برداری از منابع و محصولات، تنها با اجازه نامه کتبی از sumico مجاز میباشد و هرگونه استفاده غیر، پیگرد قانونی دارد.